

How to Using Table using 1st Variable


```
{
  "location": {
    "id": " groningen/bushalte-hoofdstat...",
    "tabs": [
      {
        "id": "bus",
        "name": "Bus",
        "locations": [
          {
            "id": " groningen/bushalte-hoofds..."
          }
        ],
        "departures": [
          {
            "time": "23:22",
            "destinationName": "Assen Kloosterveen via M.L. Kingweg",
            "viaNames": "via M.L. Kingweg",
            "mode": {
              "type": "bus",
              "name": "Qliner"
            },
            "operatorName": "Qbuzz",
            "service": "309",
            "platform": "R",
            "platformChanged": false,
            "remark": null,
            "realtimeState": "left",
            "realtimeText": "is weg"
          },
          {
            "time": "23:23",
            "destinationName": "..."
          },
          {
            "time": "23:23"
          }
        ]
      }
    ]
  }
}
```

1. Create a Page using **(IMAB) Pages** or **(IMAB) Menus**, example name "bushalte"
2. Go to **(IMAB) Table** for create a table example "departure", the following settings:

The screenshot shows the configuration interface for an IMAB Table. The following settings are highlighted with red boxes and numbered:

- 1.** Page Target (Controller): - page 'bushalte' (by table)
- 2.** Table Name (or singular name): departure
- 3.** Template for Data Listing: Thumbnail II (id + title + li)
- 4.** 1st Variable for List Item: .tabs[0].departures
- 5.** URL List Item: data/tables/departure.json

Other visible settings include: Current Table: * Edit table *Departure - Upd.1804241; Need Column: - 3 column; Source JSON: Online; URL Single Item: http://domain/json/single_movie?id=

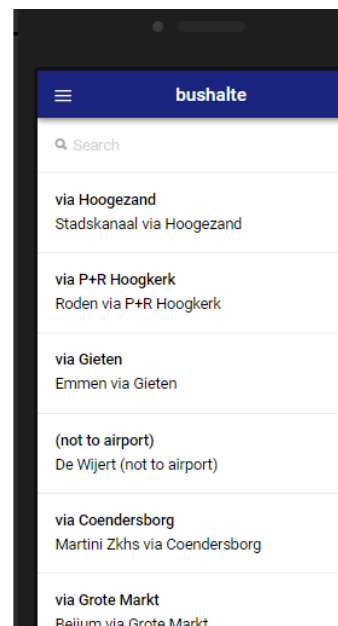

Note: for online app, please make your json source allow CORS, and change URL List Item

3. Then go to Backend Tools -> (IMAB) JSON Raw Editor (Offline Data), then select file for table "departure"

- For get example JSON Format go to (IMAB) Tables Menu, in Sample Data section checked Generate JSON Files . Do not forget for unchecked when existing ex
- JSON array can contain **multiple objects**, Example: `[{id:1,name:...},{id:2,name:...},{id:3,name:...}]`
- For import JSON from PhpMyAdmin -> Export JSON , you must checked fix enter, you can use PHP SQL - RESTAPI Generator for get SQL Column

--|- output/custom_code/www/data/tables/departure.json Edit

Fix Enter (checked for Import JSON file from PHPMysqlAdmin)

```
1 {
2   "location": {
3     "id": " groningen\bushalte-hoofdstation",
4     "type": "stop",
5     "stopType": "Bushalte",
6     "name": "Hoofdstation",
7     "place": {
8       "name": "Groningen",
9       "regionCode": "GN",
10      "regionName": "Groningen",
11      "showRegion": false,
12      "countryCode": "NL",
13      "countryName": "Nederland",
14      "showCountry": false
15    },
16    "latLong": {
17      "lat": 53.21126,
18      "long": 6.567034
19    },
20    "urls": {
21      "nl-NL": "\/ groningen\bushalte-hoofdstation",
22      "en-GB": "\/ en\ groningen\bushalte-hoofdstation"
```